


HYD MM-II S1



SELECTION CHART


PUMP SPEED - 100 SPM (NOMINAL) GEAR RATIO 15:1 MOTOR 1500 RPM				MODEL	PL. Dia mm	Max. Pr. Kg/cm ²	PUMP SPEED - 185 SPM (NOMINAL) GEAR RATIO 8:1 MOTOR 1500 RPM			
Cap. LPH	Suc. Del. mmNB/BSP	% Of Max. Pr.	Motor k.w				Cap. LPH	Suc. Del. mmNB/BSP	% Of Max. Pr.	Motor k.w
31	15	ALL	0.37	HYS MM - II S1	20	99	68	15	100	0.75
49	15				24	69	98	15		
87	15				32	38	174	15		
136	15				40	25	271	25		
164	25				44	20	328	25		
195	25				48	17	391	25		

MOC CHART

Sr.No.	Description	MOC	Sr.No.	Description	MOC
1	Plunger	EN 8	4	NRV Sealing Ring	PTFE
2	Liquid Head	SS304, SS316, Hastalloy, alloy20,P.P.,PVC,PTFE	5	NRV Balls	SS, PTFE, Glass, Ceramic
3	Non Return	SS304, SS316, Hastalloy, alloy20,P.P.,PVC,PTFE			

FEATURES

- Multiple head pumps with common drive for mixing two or more liquid in a desired ratio. The ratio can be easily reset.
- The design & Performance of Pumps conforms to API675.

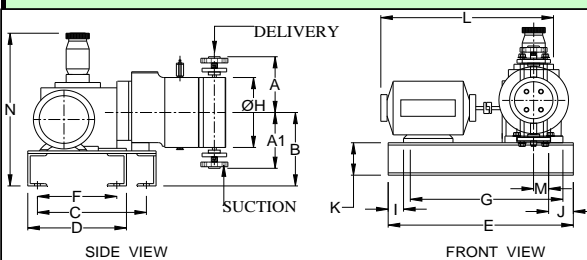

DIMENSIONS IN MM

A	A1	B	C	D	E	F
130	130	180	250	260	420	220
G	H	I	J	L	M	N
320	Ø150	55	108	480	10	450

WEIGHT (App) : 26 KG.

PACKING SIZE : 24 x 22 x 17 Inches